


Hotel SL - panic locks, 22 mm forend

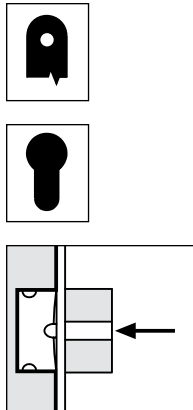

Description

Embedded emergency exit lock: depressing the handle, it instantly releases bolt and spring latch. 85 mm centre. 22 mm forend with round ends. Three backsets: 50, 60 and 70 mm. Zinc plated steel lock case and cover. Reversible lever latch made of sintered steel which guarantees an optimal closing even in combination with self closing device. Brass bolt. Holes for handle fastening with through screws. Used only in combination with a limited rotation bit Scudo Opera cylinder.


Application

For interior and main timber doors with rebate cover. Specially suitable for rebated doors in hotel rooms and community buildings.

Mounting

Mill the panel according to the dimensions shown in the diagram the cutout for housing the lock has to be at least 16 mm thick (8 mm for each side from the lock axis). Secure the lock with two 4.5x25 mm screws. To reverse the spring latch, unscrew the pin from the lock back with a 4 mm Allen wrench, execute a rotation of 180°, fasten the central nylon insert to the lock and re-screw the pin.

NB. Cardboard box containing one lock and one screw for fastening the cylinder. The strikers (right and left) and the cylinder must be ordered separately.

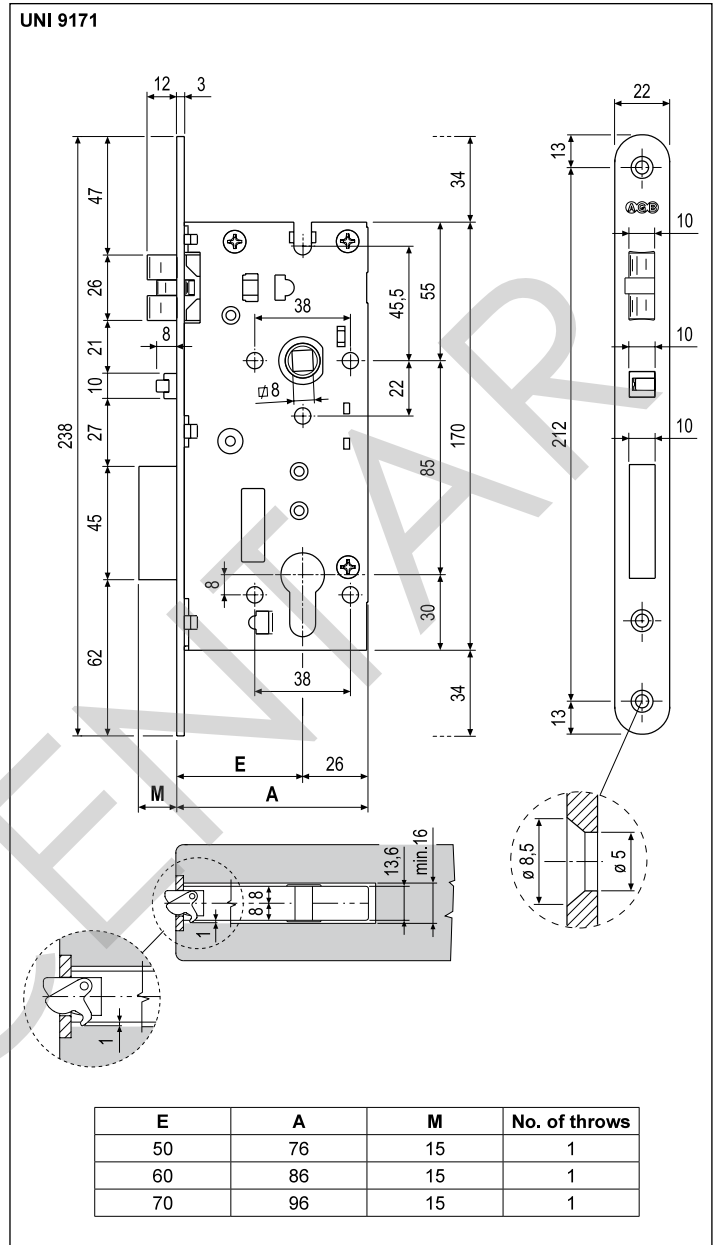

Order Specifications

Ref.	SALES CODE			Type
	Backset	Finish code		
B50101	50-60-70	XX		r.h.
B50102	50-60-70	XX		l.h.

Order Specifications - without anti-thrust latch

Ref.	SALES CODE			Type
	Backset	Finish code		
B50501	50-60-70	XX		r.h.
B50502	50-60-70	XX		l.h.

NB. Refer to the price list in force to check the availability of the finishes.