

# 96 mm corner bracket



**Description**

Shaped pressed steel corner bracket, 220x220 mm long and 3 mm thick, with holes for hinge connection positioned 96 mm from the corner. The special shape of the inner face of the bracket ensures excellent attachment to the shutter. Right or left-handed versions available.



**Application**

Used to reinforce the joint between the shutter stiles and rails on the hinge side. Specially suitable for blinds where adequate system steadiness might not be guaranteed by the use of hinges that are fixed to the stile only. To be used in combination

with the supports for adjustable hinges, or attach directly to fixed and coplanar Abaco hinges.

**Mounting**

Couple the corner bracket with the relative support or hinge and fasten the whole follop the instructions provided in the technical specifications for these components. Then secure the bracket with six additional screws. We recommend the use of theft-proof screws as they ensure greater system steadiness and security. Alternatively, you can use 4.5x30 mm screws with thread suitable for the shutter material, or rivets (for PVC or aluminium systems only).

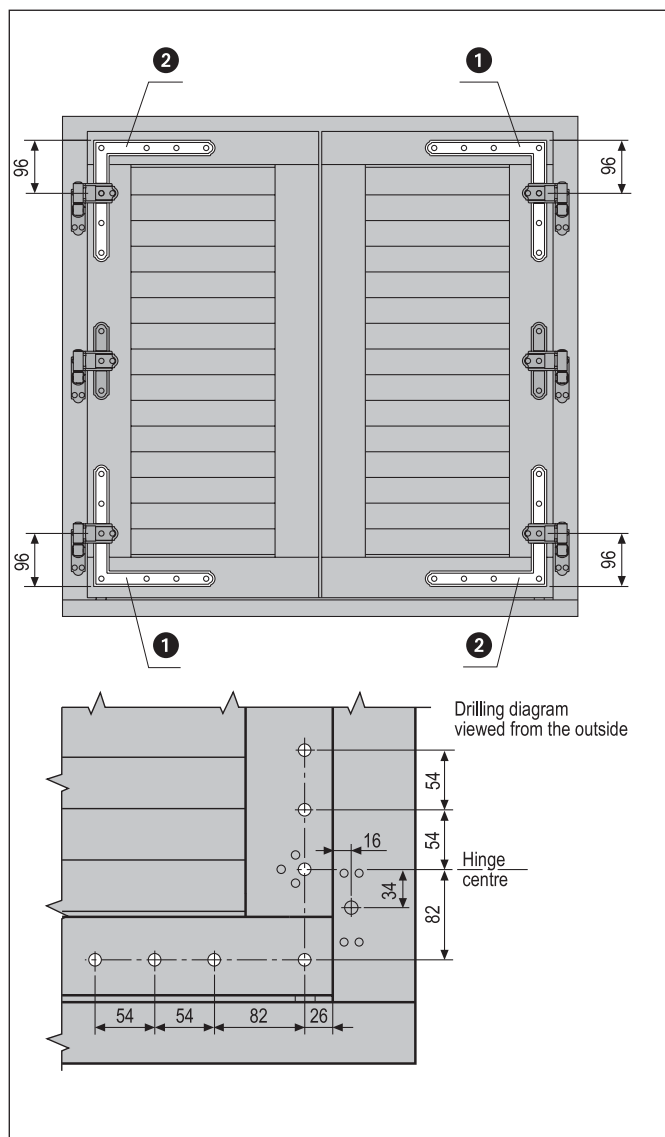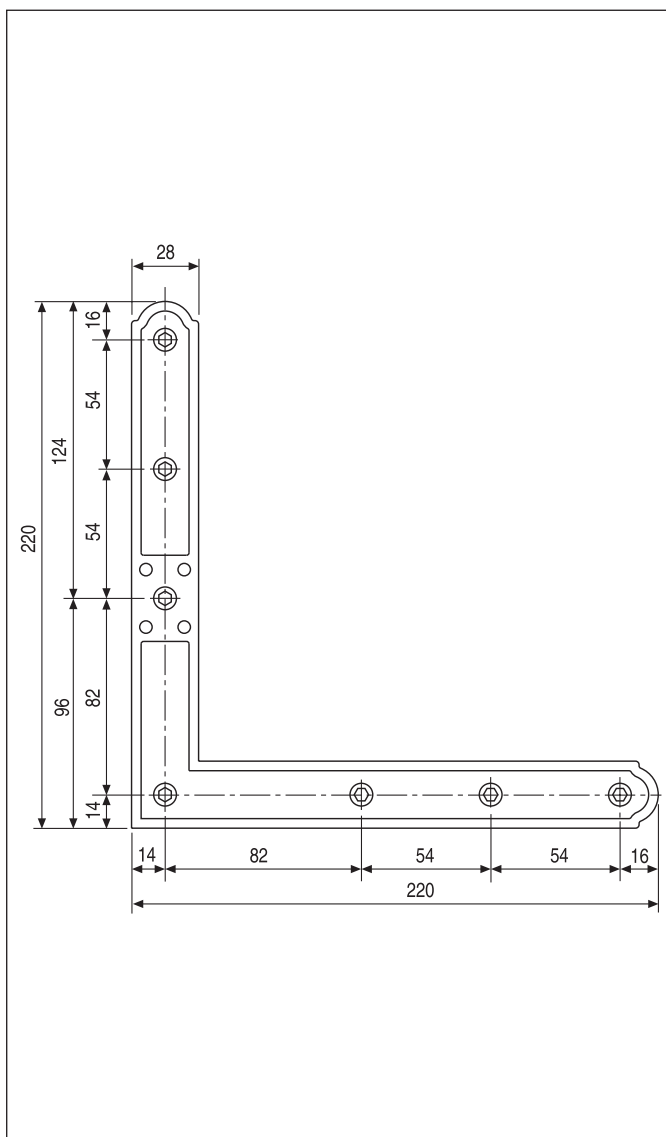

**Order Specifications**

Ref.	Type	Black finish	Bichromated finish
		Article	Article
1	Upper r.h. / lower l.h.	H00919.04.93	H00919.04.04
2	Upper l.h. / lower r.h.	H00919.03.93	H00919.03.04