


 DC130

ZATVARAČ ZA VRATA SA PODESIVOM
SNAGOM ZATVARANJA
DOOR CLOSED WITH VARIABLE CLOSING
POWER




E	Snaga Size	Ugao otvaranja Opening angle	Pozicioniranje Leva vrata Foot position L/H door	Pozicioniranje desna vrata Foot position R/H door
90	EN 3	180°		
110	EN 4	180°		


Ugradnja na stranu šarki na vratima (slika: leva vrata)
Installation on door hinge side (picture: on left hand door)

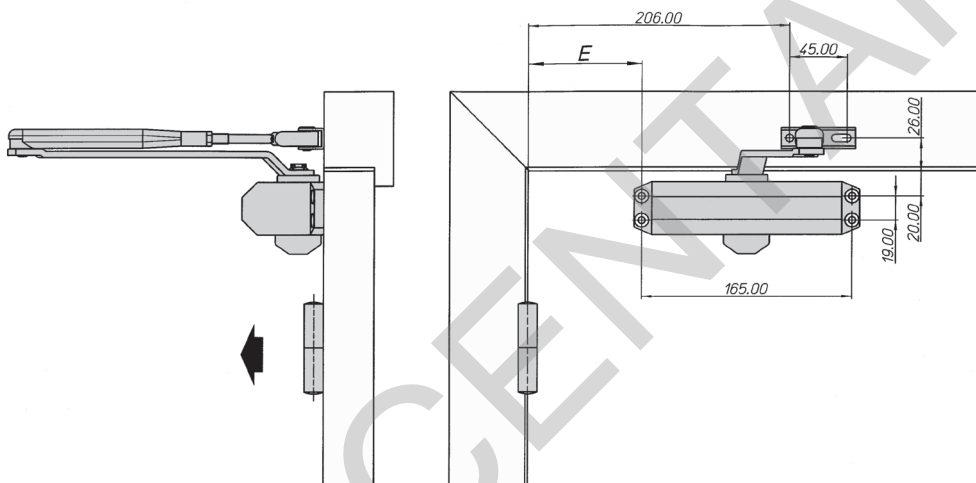

Ugradnja na štoku, šarka na drugoj strani (slika: leva vrata)
Installation on frame, hinge opposite side (picture: on left hand door)

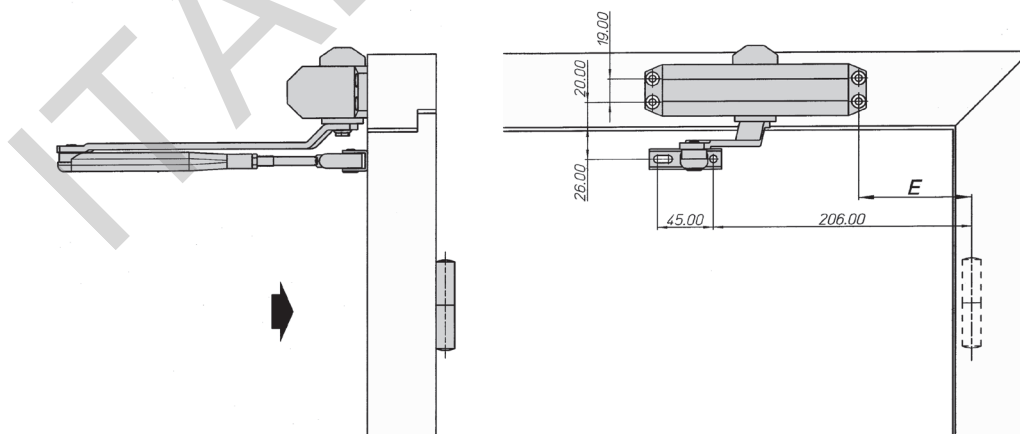

Za desna vrata, dimenzije su identične ali obrnute
For right hand opening doors, dimensions are identical but spectacular

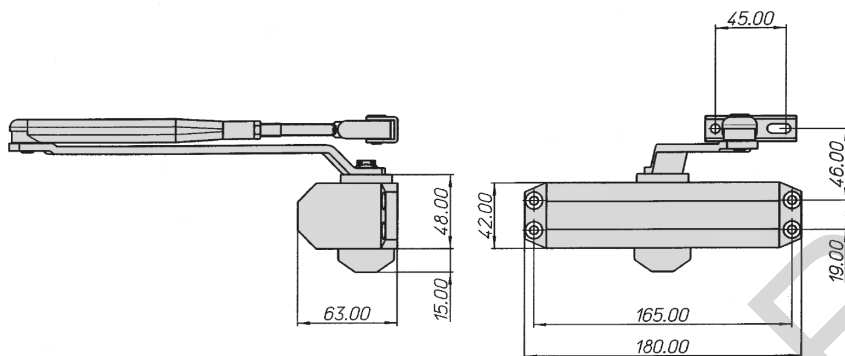



Varijabilna sila zatvaranja (vidi šemu montaže)	EN 3-4	Variable closing power (see Installations and mounting)	EN 3-4
Maksimalna širina vrata	EN 3 mm 950 EN 4 mm 1100	Maximum door width	EN 3 mm 950 EN 4 mm 1100
Težina vrata	EN 3 Kg 45 ÷ 60 EN 4 Kg 60 ÷ 80	Door weight	EN 3 Kg 45 ÷ 60 EN 4 Kg 60 ÷ 80
Dostupno za vrata	DIN desno DIN levo	Non - Handed	DIN right DIN left
Podesiva brzina zatvaranja odnosi sena 2 nezavisna intervala	180° - 6° 10° 6° 10° - 0°	Adjustable closing and final latch speed by means of 2 independent valves	180° - 6° 10° 6° 10° - 0°
Makaze	ST standard HO sa kočnicom HS klizno sa kočnicom	Arm	ST standard HO hold open HS sliding arm hold open
Završne obrade	NA srebro NE crno	Standard finishes	NA enamelled silver NE enamelled black
Ostale obrade	Po zahtevu	Other finishes	On request
Dimenzije	Dužina mm 180 Visina mm 42 Dubina mm 63	Dimensions	Length mm 180 Width mm 42 Height mm 63
Pakovanje	Kutija sa 1 kom	Packaging	Box in 1's
Težina (sa pakovanjem)	Kg 1,10	Weight (box included)	Kg 1.10

Dostavljeno sa:

- 1 makaza (izabrati)
- 6 vijaka za drvo
- 6 vijaka za metal

Supplied with:

- 1 arm (to be advised)
- 6 fixing screws for wood
- 6 fixing screws for metal

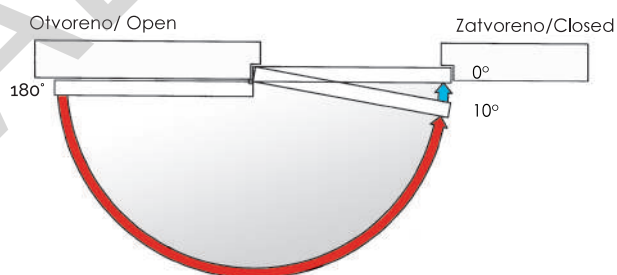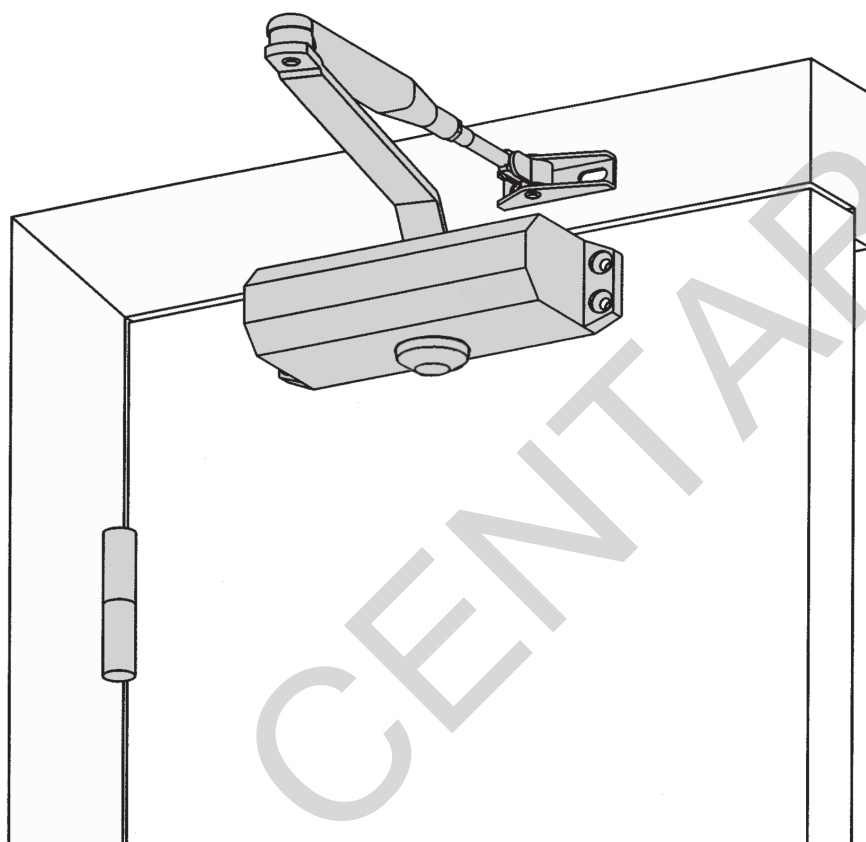

■ Brzina zatvaranja
Closing speed

■ Krajnje zatvaranje
Final latch

