




ZATVARAČ ZA VRATA SA PODESIVOM SNAGOM


DOOR CLOSED WITH ADJUSTABLE POWER




Ugradnja na strani šarki sa vratima (slika: leva strana)
Installation on door hinge side (picture: on left hand door)

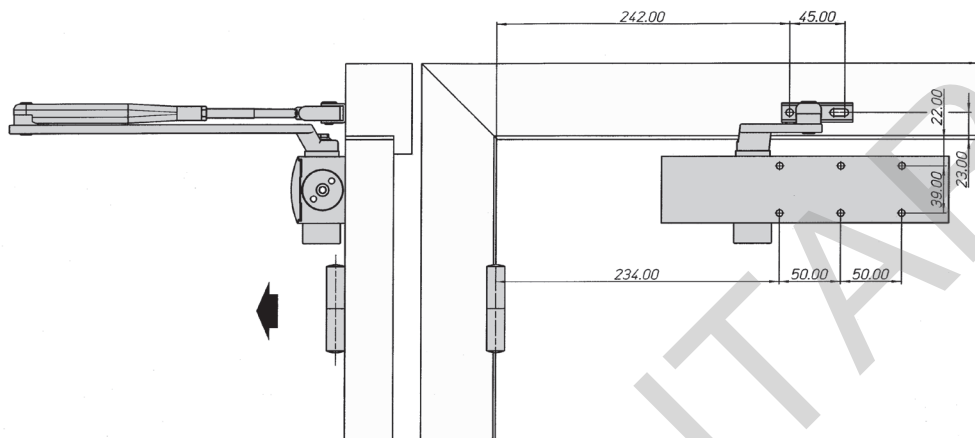

Ugradnja na štoku, šarka na drugoj strani (slika: leva strana)
Installation on frame, hinge opposite side (picture: on left hand door)

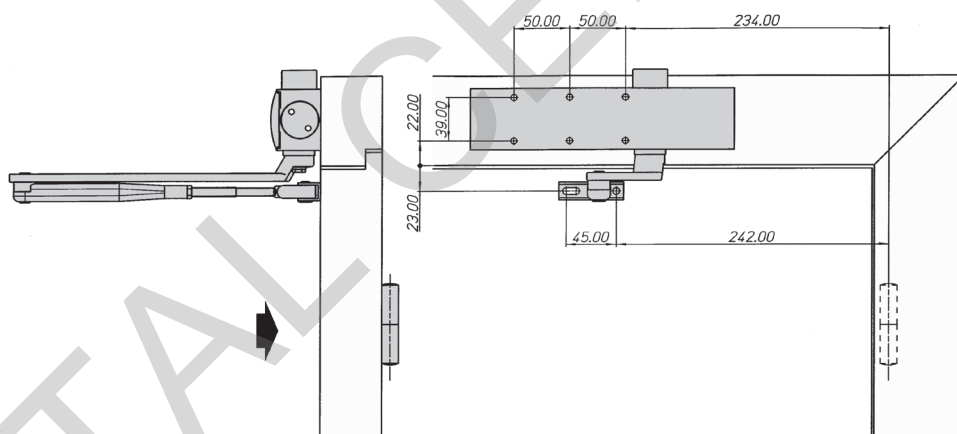

Za desna vrata, dimenzije su identične ali obrnute
For right hand opening doors, dimensions are identical but specular

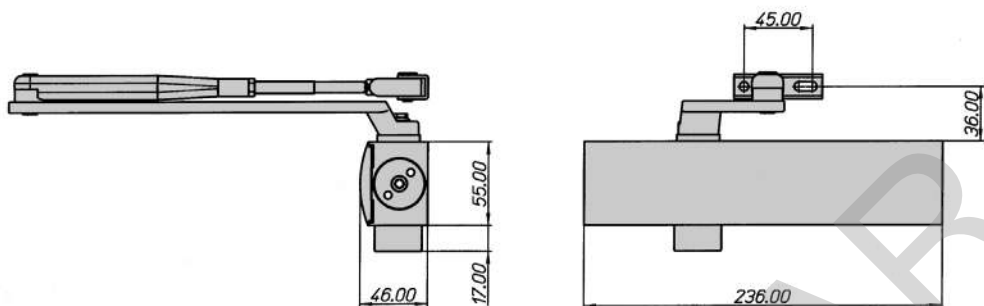



Podesiva snaga zatvaranja Regulisanje snage preko opruge	EN 2-3-4-5	Adjustable closing power Power regulation by springs	EN 2-3-4-5
Maksimalna širina vrata	EN 2 mm 850 EN 3 mm 950 EN 4 mm 1100 EN 5 mm 1250	Maximum door width	EN 2 mm 850 EN 3 mm 950 EN 4 mm 1100 EN 5 mm 1250
Težina vrata	EN 2 Kg 25 ÷ 45 EN 3 Kg 45 ÷ 60 EN 4 Kg 60 ÷ 80 EN 5 Kg 80 ÷ 110	Door weight	EN 2 Kg 25 ÷ 45 EN 3 Kg 45 ÷ 60 EN 4 Kg 60 ÷ 80 EN 5 Kg 80 ÷ 110
Dostupno za vrata	DIN desno DIN levo	Non - Handed	DIN right DIN left
Podesive brzina zatvaranja odnosi se na 2 nezavisna imntervala	180° - 10° 10° - 0°	Adjustable closing and final latch speed by means of 2 independent valves	180° - 10° 10° - 0°
Makaze	ST standard HO sa kočnicom HS klizno sa kočnicom	Arm	ST standard HO hold open HS sliding arm hold open
Završne obrade	NA verniciato srebro NE verniciato crno	Standard finishes	NA enamelled silver NE enamelled black
Ostale obrade	Po zahtevu	Other finishes	On demand
Dimenzije	Dužina mm 180 Širina mm 42 Visina mm 63	Dimensions	Length mm 236 Width mm 55 Height mm 46
Pakovanje	Kutija sa 1 kom	Packaging	Box in 1's
Težina (sa pakovanjem)	Kg 1,10	Weight (box included)	Kg 2,30

Dostavljeno sa:

1 makaza (izabrati)
6 vijaka za drvo
6 vijaka za metal

Supplied with:

1 arm (to be advised)
1 cover
6 fixing screws for wood
6 fixing screws for metal

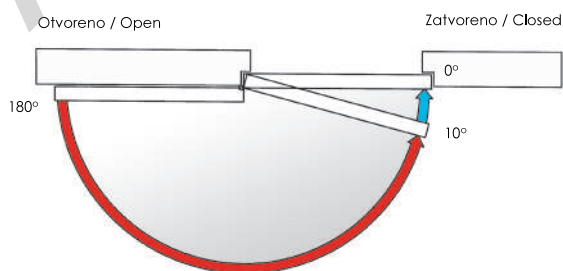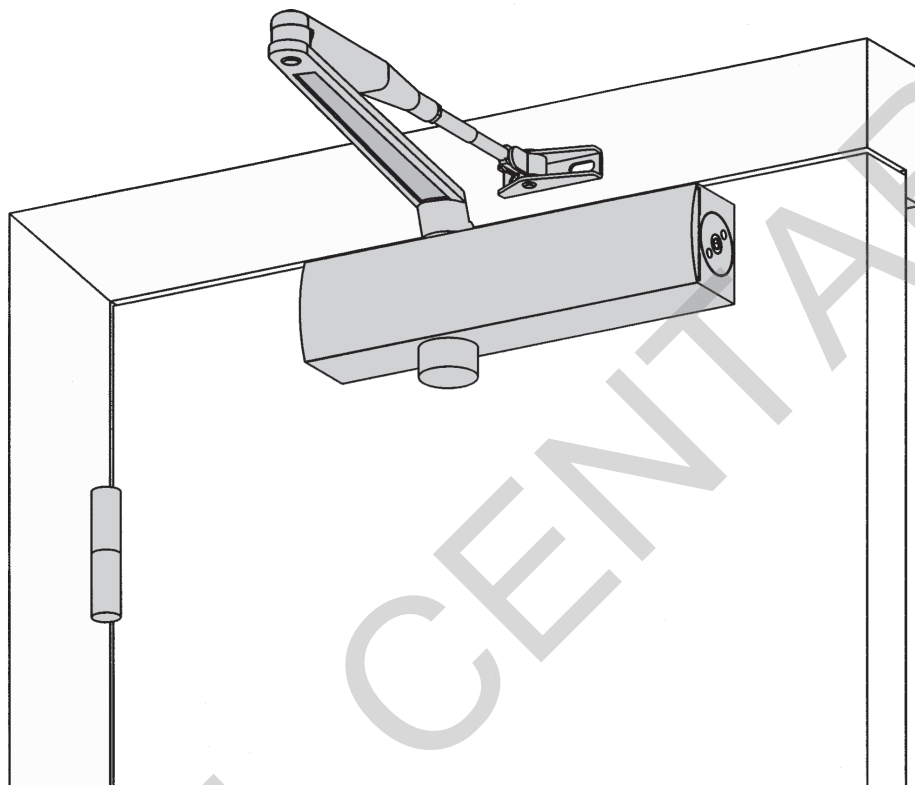

■ Brzina zatvaranja
Closing speed

■ Krajnje zatvaranje
Final latch

