

 DC550


SKRIVENI ZATVARAČ ZA VRATA SA
PODESIVOM SNAGOM


CONCEALED DOOR CLOSER WITH
ADJUSTABLE POWER



Debljina vrata/Door thickness	
Drvo/Wood	Aluminijum/Aluminium
min. mm 45	min. mm 41

Ugradnja u vrata desno/levo
Left/Right hand opening doors

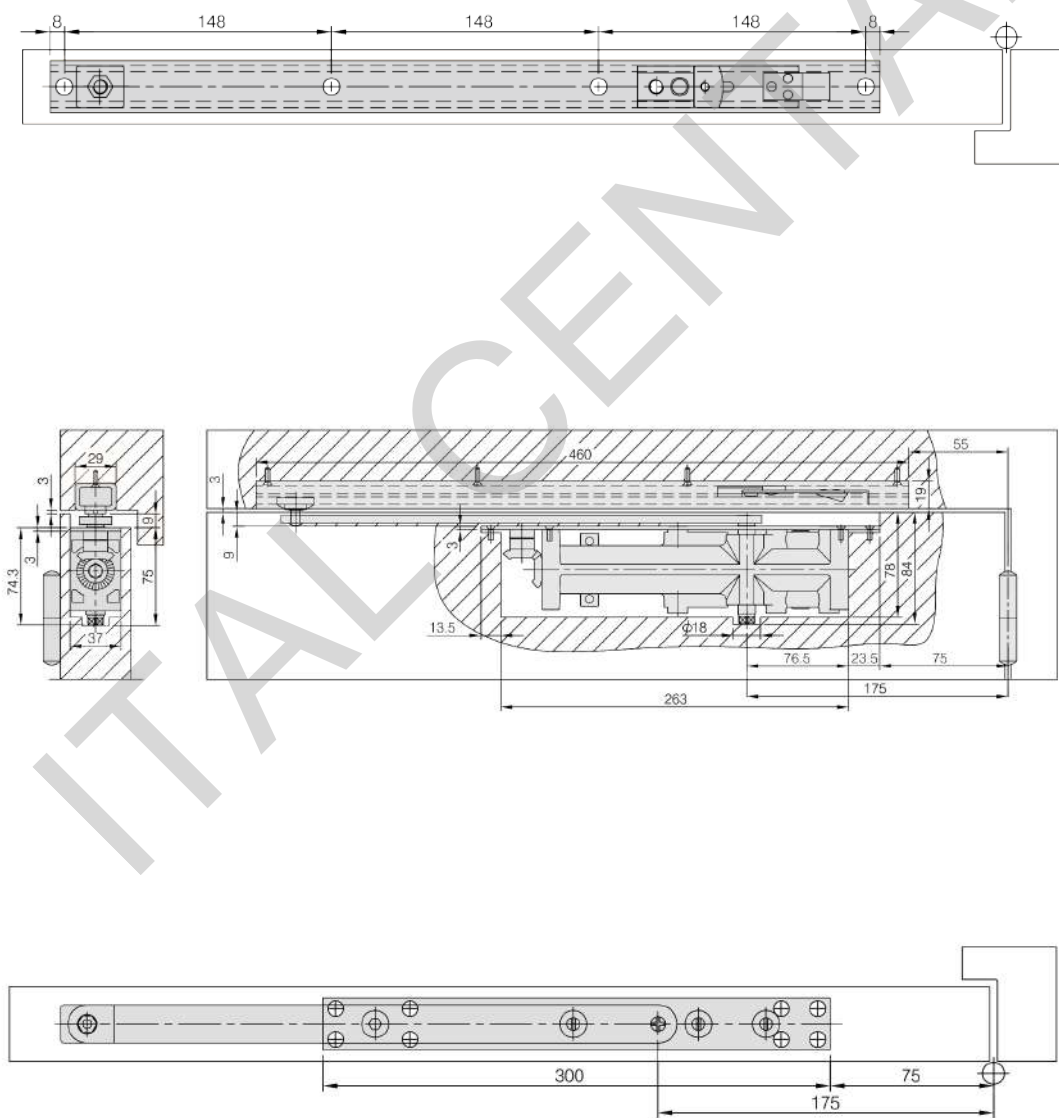

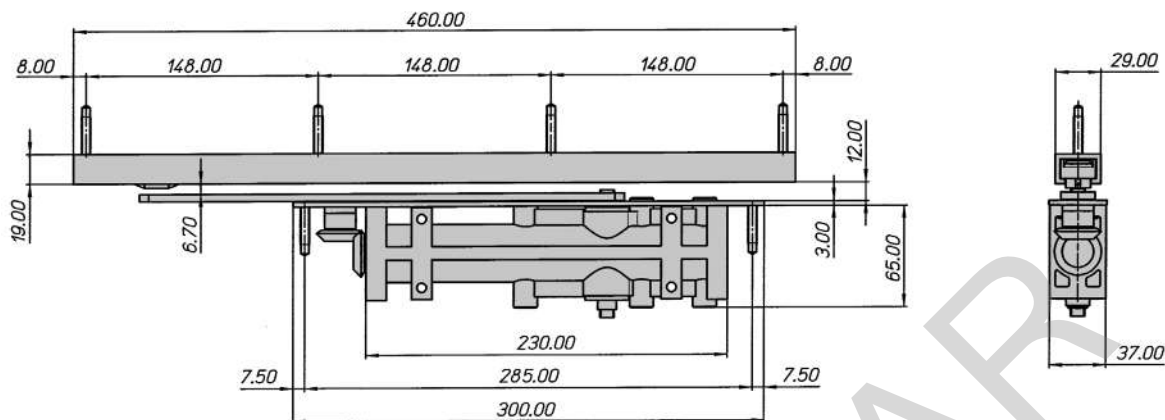



Podesiva snaga zatvarača Podešavanje preko opruge	EN 2-3-4	Adjustable closing power Power regulation by springs	EN 2-3-4
Maksimalna širina vrata	EN 2 mm 850 EN 3 mm 950 EN 4 mm 1100	Maximum door width	EN 2 mm 850 EN 3 mm 950 EN 4 mm 1100
Težina vrata	EN 2 Kg 25 / 45 EN 3 Kg 45 / 60 EN 4 Kg 60 / 80	Door weight	EN 2 Kg 25 ÷ 45 EN 3 Kg 45 ÷ 60 EN 4 Kg 60 ÷ 80
Pažnja Samo za otvaranje do 90°	EN 5 mm 1250 EN 5 Kg 80/100	Attention Only for 90° openin	EN 5 mm 1250 EN 5 Kg 80 ÷ 100
Dostupno za vrata	DIN desno DIN levo	Non - Handed	DIN right DIN left
Podesiva brzina zatvaranja odnosi se na 2 nezavisna intervala	120° - 10° 10° - 0°	Adjustable closing and final latch speed by means of 2 independent valves	120° - 10° 10° - 0°
Makaze	Klizna ruka	Arm	Sliding arm
Kočnica	Podesiva Uklonjiva	Hold open	Adjustable Removable
Završne obrade	NA srebrno NE crno	Standard finishes	NA enamelled silver NE enamelled black
Dimenzije		Dimensions	
Telo	Dužina mm 255	Body	Length mm 255
Poklopac	Dužina mm 300 Širina mm 37 Visina mm 75	Plate	Length mm 300 Width mm 37 Heigh mm 75
Pakovanje	Kutija na 1 kom	Packaging	Box in 1's
Težina (sa pakovanjem)	Kg 2.2	Weight (box included)	Kg 2.2

Dostavljeno sa:

1 Klizna makaza sa podesivom kočnicom
1 kočnica za montažu 5 mm
8 vijaka za drvo
8 vijaka za metal

Supplied with:

1 sliding arm with adjustable hold open
1 assembling key mm 5
8 fixing screws for wood
8 fixing screws for metal

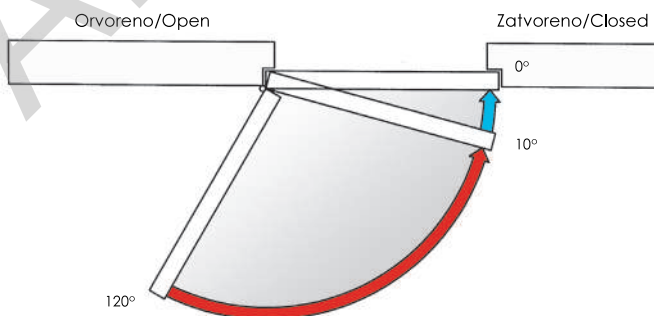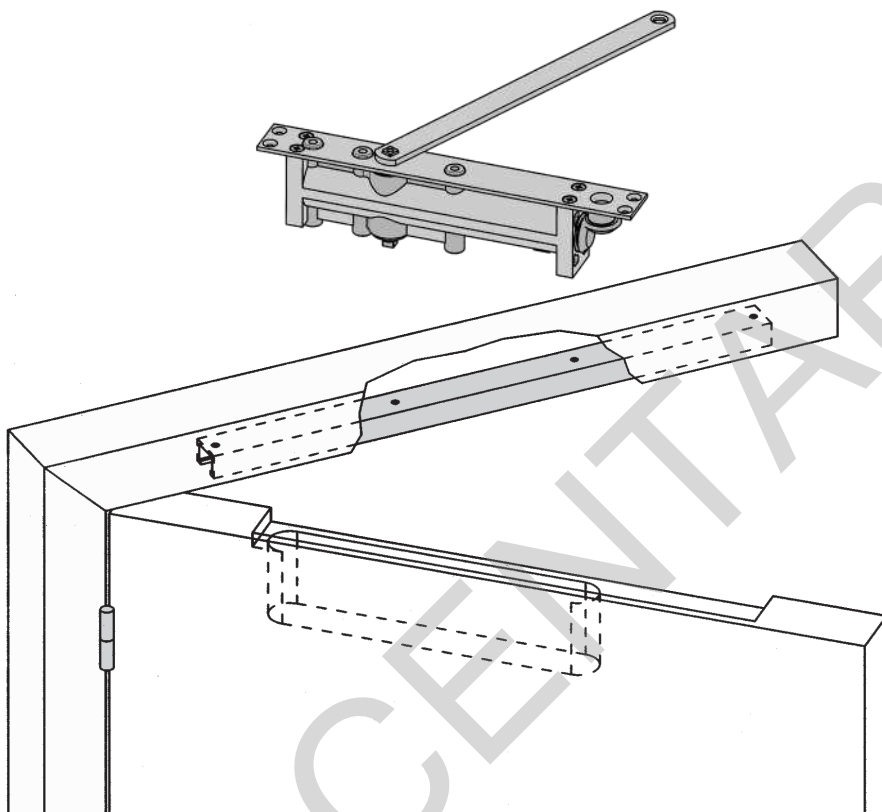

Brzina zatvaranja
Closing speed

Krajnje zatvaranje
Final latch

