

Circular pivot windows

AGB



The first gap 12 system




Hinge blocking




The hinge friction is easy to reach and adjust thanks to the Allen wrench.


Independent and friction hinges

The hinges are equipped with friction and independent from the movement transmission, therefore they do not require any milling on the sash nor on the frame. Moreover, a rapid coupling system makes it possible to assemble and disassemble the movable sash without removing the hinge.

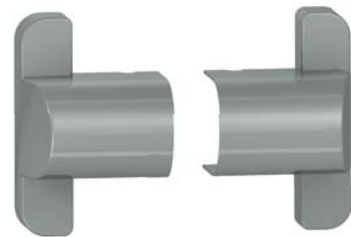


The covers are available in several colours.

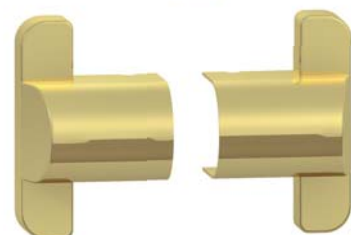


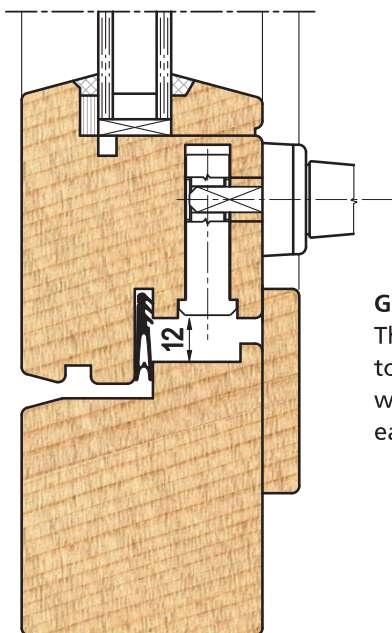

Gap 12
Thanks to Tour it is possible to realize also gap 12 pivot windows which are thus easier and quicker to make.

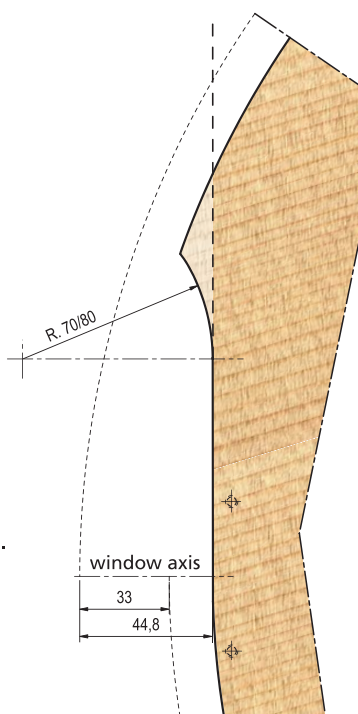

The milling for the transmission of the movement to the upper part takes just a moment.

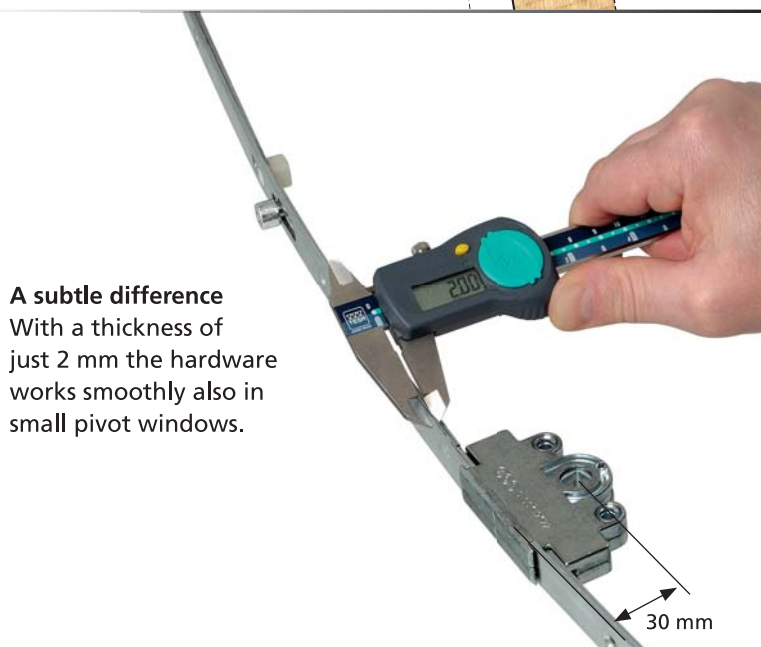

A subtle difference
With a thickness of just 2 mm the hardware works smoothly also in small pivot windows.



The 30 mm backset avoids the contact between the handle and the frame staff bead thus offering great freedom when choosing the handle and easy opening/closing operations.



Easy cleaning
The window turns of 180° to make the outside glass easy to clean.